



Features



- 21.5" TFT LCD with full HD resolution of 1920x1080
- Sheet Metal Enclosure
- NEMA 4/IP65 compliant front bezel
- OSD at front side
- VESA mount 100 x 100
- Anti-reflection glass in front for protection (optional touch panel)
- Default AC 100~240V input, optional DC 11~32V input
- Default: VGA input, Optional: DVI, RCA, and S-Video input



Dimension



Specifications




LCD	
Display Type	21.5" TFT-LCD
Max. Resolution	1920×1080
Max. Colors	16.7M
Luminance (cd/m ²)	250 nits
Contrast Ratio	3000:1
Viewing Angle	H:178° / V:178°
Backlight Lifetime	30,000hrs
System	
Outside I/O port	Default: VGA input AC 100~240V input Option (reserved): DVI RCA S-Video Touch I/O 3-pin terminal block for DC 11~32V input
OSD control	OSD on the front side default, OSD on the rear side for option

Power	
Power Input	AC input / DC 11~32V optional
Touch Screen – Resistive Type (Option)	
Interface	USB / RS-232
Light Transmission	Over 80%

Mechanical	
Construction	Metal front panel + Metal housing, black
IP Rating	Front panel IP65
Mounting	Panel mount / VESA mount 100 x 100
Dimension	557(W) x 362(H) x 68(D) mm

Environmental	
Operating Temperature	0~50°C
Storage Temperature	-20~60°C
Storage Humidity	10%~90% @ 40°C non-condensing
Certificate	CE/FCC Class A

Ordering Information	
ADP-1224A-04	21.5" Full HD Industrial Display, VGA input, OSD on front side, AC 100~240V power input and without touch, steel enclosure

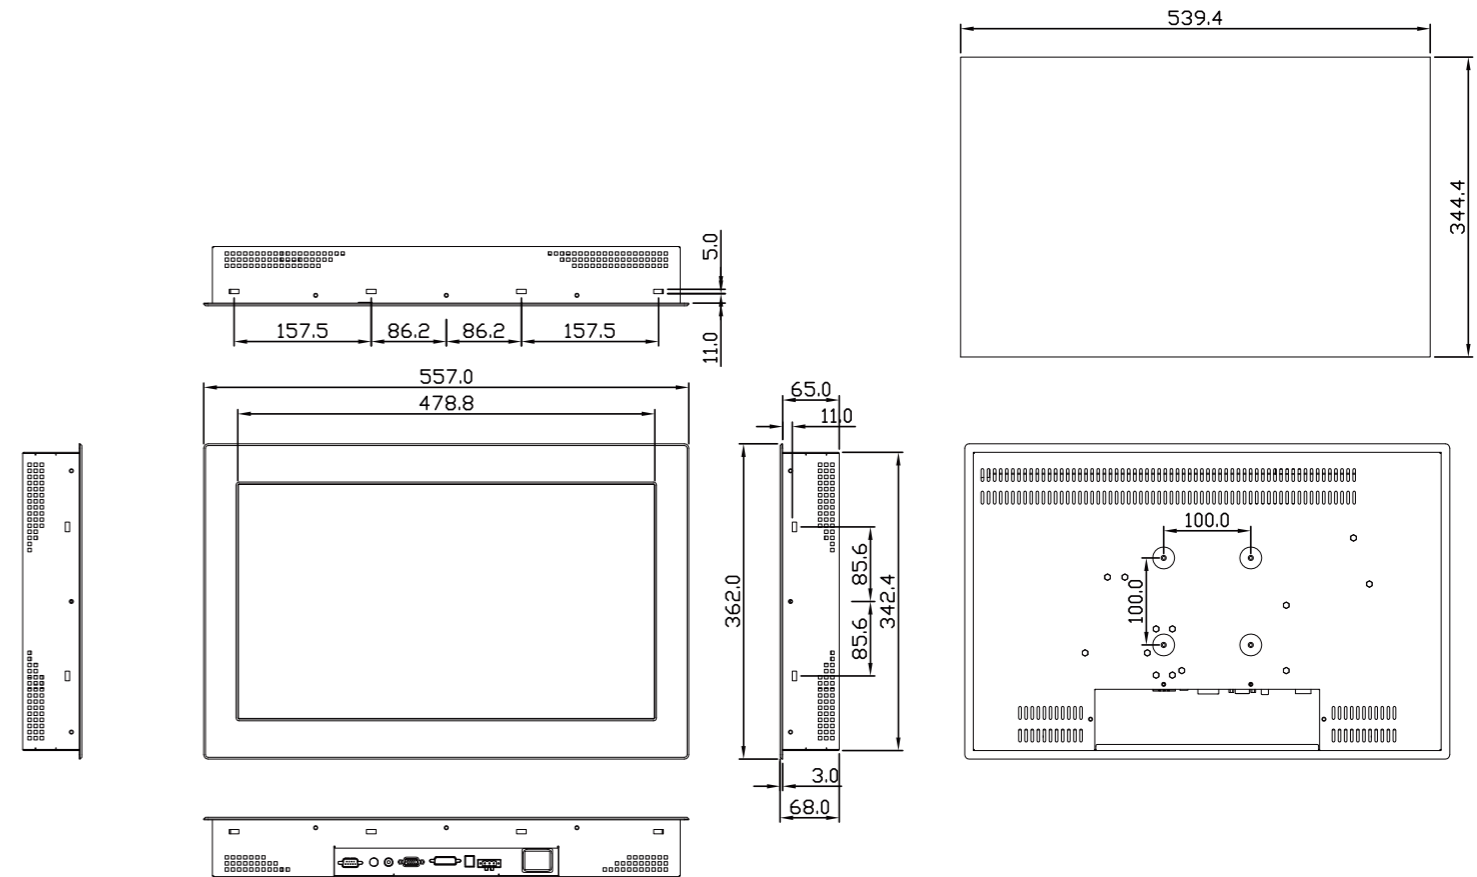

VIVATECH LLC
 Sharjah Media City, Sharjah, UAE
 Call: +97 1589584527
 Call: +91 9004784527
 Email : sales@vivatech.ae
 Website : www.vivatech.ae